



### ECW7211-L

#### 802.11ac Dual-Band Wireless Cloud-based Access Point



#### Product Overview

The ECW7211-L is Cloud-based indoor 802.11a/b/g/n/ac dual-band, dual-radio enterprise AP with a 3x3 MIMO cost effective indoor AP. Through its Gigabit Ethernet port the 802.11ac dual-band wireless AP can connect to the backbone network. The ECW7211-L supports 802.3at/af PoE, which enables the AP to be powered remotely by a PoE switch. An AC power adapter option is also included for locations where PoE is not available.

#### Key Features and Benefits

##### Cloud-Enabled Networking


The ECW7211-L is cloud-enabled out of the box allowing for easy, highly scalable installation, configuration, and management.

##### Dual Band AC1200 Operation

The ECW7211-L is capable of operating simultaneously at 2.4GHz (802.11b/g/n) as well as 5GHz (802.11a/n/ac) to supply ample throughput for the most demanding applications.

##### Robust & Simple Mounting Kit

The ECW7211-L can be wall, ceiling, or desktop mounted, greatly simplifying installations in both offices and homes.

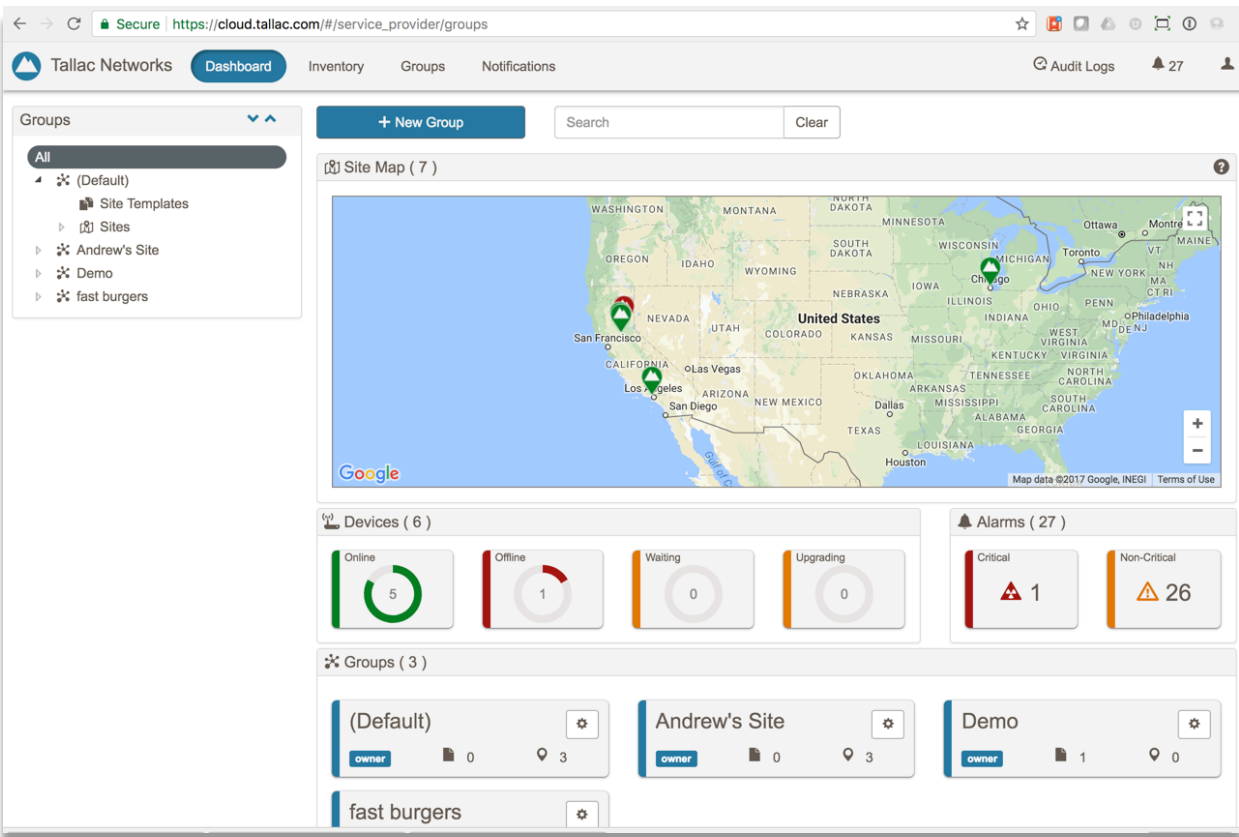



# Tallac Networks

## Tallac SD-LAN Datasheet

### ECW7211-L Product Specifications

#### Features

- One 10/100/1000BASE-T Gigabit Ethernet (RJ-45) port with 802.3at/af-compliant Power over Ethernet (PoE) support
- One 10/100/1000BASE-T Gigabit Ethernet (RJ-45) port
- One console port (10/100/1000BASE-T) with an RJ-45 connector
- One USB 2.0 port
- Three LEDs: Power, Eth 0/PoE, Eth 1, 2.4G/5.0G

#### Standards

IEEE 802.11n 2.4 GHz and 5.0 GHz  
IEEE 802.11ac/a 5.0 GHz  
IEEE 802.11b/g, 2.4 GHz  
IEEE 802.3, IEEE 802.3u, IEEE 802.3ab  
IEEE 802.3af Power over Ethernet (PoE)  
IEEE 802.11h Regulatory Domain Selection  
IEEE 802.11i  
Wi-Fi Multimedia (WMM)  
Wireless Distribution System (WDS)

#### Wireless Frequency

802.11g/n:

- 2.4 ~ 2.4835 GHz (US, Canada)
- 2.4 ~ 2.4835 GHz (ETSI, Japan)

802.11b:

- 2.4 ~ 2.4835 GHz (US, Canada)
- 2.4 ~ 2.4835 GHz (ETSI)
- 2.4 ~ 2.497 GHz (Japan)

802.11a/n/ac:

- 5.15 ~ 5.25 GHz (lower band) US/Canada, Europe, Japan
- 5.25 ~ 5.35 GHz (middle band) US/Canada, Europe, Japan
- 5.725 ~ 5.825 GHz (upper band) US/Canada
- 5.50 ~ 5.70 GHz Europe
- 5.47 ~ 5.725GHz

#### Security

- WEP 64/128-bits
- Wi-Fi Protected Access (WPA/WPA2)
- WPA/WPA2 (PSK) over WDS
- Secure SSH (Secure Sockets Shell), Telnet
- Secure Sockets Layer (SSL) remote management login
- HTTPS
- Access control list
- RADIUS authentication
- EAP-MD5, EAP-TLS, EAP-TTLS, PEAP, EAP-SIM, and EAP-AKA
- SSID broadcast disable
- Support TPM (Trusted Platform Module)

#### Antenna

Type: PCB type  
Gain: 4dBi in 2.4GHz, 5dBi in 5GHz

#### Regulatory Compliance

FCC Part 15 Subpart B  
CE  
NCC, BSMI

#### Radio Signal Certification

FCC Part 15C 15.247, 15.207 (2.4GHz)  
EN 300 328  
EN 301 489-1  
EN 301 489-17

#### Mechanical

Dimensions: 20 x 20 x 3.65 cm  
Weight: 0.75 kg

#### Power

Input: 100 or 240 VAC, 50-60 Hz  
Output: 48V/ 2A  
Power Consumption: 14 W maximum

#### Environmental Specification

Temperature:  
Standard Operating: 0°C to 50°C  
Storage: -20°C to 70°C  
Humidity: 10% to 90% (non-condensing)

#### Wireless Features

- Output power: 2.4GHz: 15dBm, 5GHz: 20dBm
- VAP (Virtual Access Point) support with up to 32 SSIDs (2.4GHz: 16, 5GHz: 16)
- Operation modes: AP Mode, Point-to-Point WDS, Point-to-Multiple points WDS, WDS With AP
- Transmit power adjustment
- IEEE 802.11h DFS/DFS2 and automatic TPC
- Traffic Control for each SSID
- Band Preference for same SSID services on dual band
- Dynamic Channel Selection for noisy environment
- Rate Selection to disable low data rate access
- Band steering
- Auto-channel selection
- Supports Multi-cast
- Throughput: Data Rate (1.3Gbps+450Mbps)
- Concurrent users: 200 clients

#### Warranty

3 years